

INFRASOUNDS SPECIFICATIONS

INFRASOUND NODE SENSOR



**INFRA SONITUS
NODE SENSOR**

Channel
Version
Quality Control




BIOAGE srl

POWER SUPPLY: 6V - 15V
CURRENT: 5.6mA @ 12V
SAMPLING RATE: 150Hz
INFRASOUND SNR: 84.3dB
LPF CUTOFF FREQ: 20Hz
LPF ORDER: 5
TEMPERATURE ACCURACY: 1°C
VOLTAGE SUPPLY ACCURACY: 59 mV
OUTPUT DATA: OPTICAL ST CONN.

Via Trento,77 - 88046 Lamezia Terme (CZ) info@bioage-srl.com
Tel:+39 0968 442724 Fax:+39 0968 51061 www.bioage-srl.com

INFRASOUND RECEIVER

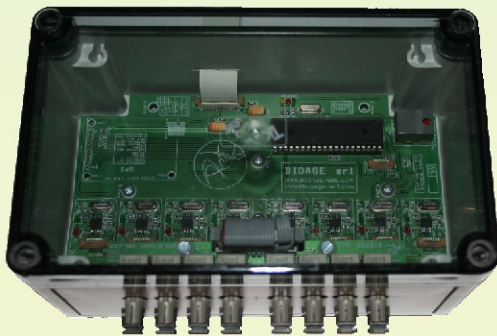

**INFRA SONITUS
8 CH RECEIVER**

CHANNELS : 8
POWER SUPPLY: 7.0Volt ... 15.0Volt
INPUT DATA: *Optical ST Connector*
DATA OUT: *19200 Baud*
DATA FREQ: *50 Samples/Sec*
DIAGNOSTICS: *Optical Fibre Integrity*
DIAGNOSTICS: *Accumulator Charge Status*

BIOAGE SRL

BIOelectronics and **A**dvanced **G**enomic **E**ngineering



ADDRESS: BIOAGE s.r.l.
Via Trento, 77
88046 Lamezia Terme
(CZ) ITALY

TEL: (+39) 0968 51061
FAX: (+39) 0968 51061
MOBILE: (+39) 349 3564443

WEBSITE:
www.bioage-srl.com

EMAIL:
info@bioage-srl.com
research@bioage-srl.com
quotation@bioage-srl.com
services@bioage-srl.com